



## TYP MIN/MAX ACTUATORS

### FOR CONSTANT VOLUME FLOWS WITH V<SUB>MIN</SUB>/V<SUB>MAX</SUB> SWITCHING IN AIR CONDITIONING SYSTEMS

Actuators for mechanical self-powered CAV controllers Type EN, RN, or VFC, and for flow adjustment dampers Type VFR

- Switching between two volume flow setpoint values, e.g. for daytime and night-time operation
- Supply voltage 24 V AC/DC or 230 V AC
- Control input signal: 1-wire control or 2-wire control (3-point)
- Potentiometer or mechanical stops
- Positive lock connection with CAV controller
- Retrofit possible

## Application

### Application

- Actuators for min/max switching
- Switching between volume flow setpoint values of mechanical self-powered CAV controllers Type RN, EN or VFC
- Change of the damper blade positions of flow adjustment dampers Type VFR

## Description

### Parts and characteristics

- Potentiometer or mechanical stops for setting the volume flow rate setpoints
- Supply voltage 24 V AC/DC or 230 V AC
- Overload protection

- 1-wire control or 2-wire control (3-point)
- Optional auxiliary switch for capturing the end positions

## INFORMACJE TECHNICZNE

### Functional description


The actuator moves a damper blade or a damper blade mechanism to the minimum or maximum position.

Minimum and maximum positions can be set on potentiometers or using mechanical stops.

1-wire control or 2-wire control (3-point) can be used.


1-wire control is actually an open/close control or min/max control.

#### 1-wire control

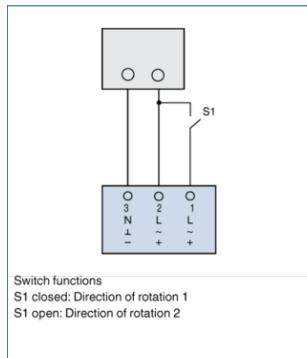

Control input signal for module groups B\*\* and E\*\*  
Direction of rotation 1:  $V_{max}$   
Direction of rotation 2:  $V_{min}$

#### 2-wire control (3-point)

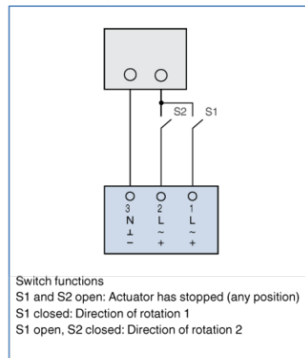

Control input signal for attachment group M\*\*  
Direction of rotation 1:  $V_{min}$   
Direction of rotation 2:  $V_{max}$

#### Actuators for volume flow controllers Type RN or EN

Order code detail	Actuator			Auxiliary switch	
	Part number	Model	Supply voltage	Part number	Model
B50	M466DT4	LM24A-F	24 V	-	-
B52	M466DT4	LM24A-F	24 V	M536AI3	S2A
B60	M466DT5	LM230A-F	230 V	-	-
B62	M466DT5	LM230A-F	230 V	M536AI3	S2A

#### Actuators for volume flow controllers Type VFC and for flow adjustment dampers Type VFR

Order code detail	Part number	Model	Setpoint setting	Supply voltage
E01	M466EP6	224-024-02	Potentiometer	24 V
M01	M466EP4	CM24-F	Mechanical stops	24 V
E02	M466EP8	224-230-02	Potentiometer	230 V
M02	M466EP5	CM230-F	Mechanical stops	230 V